




Coach Screws AS 1393 Standard

This snapshot is an extract from the full version
 Scan the QR code to see our coach screw range

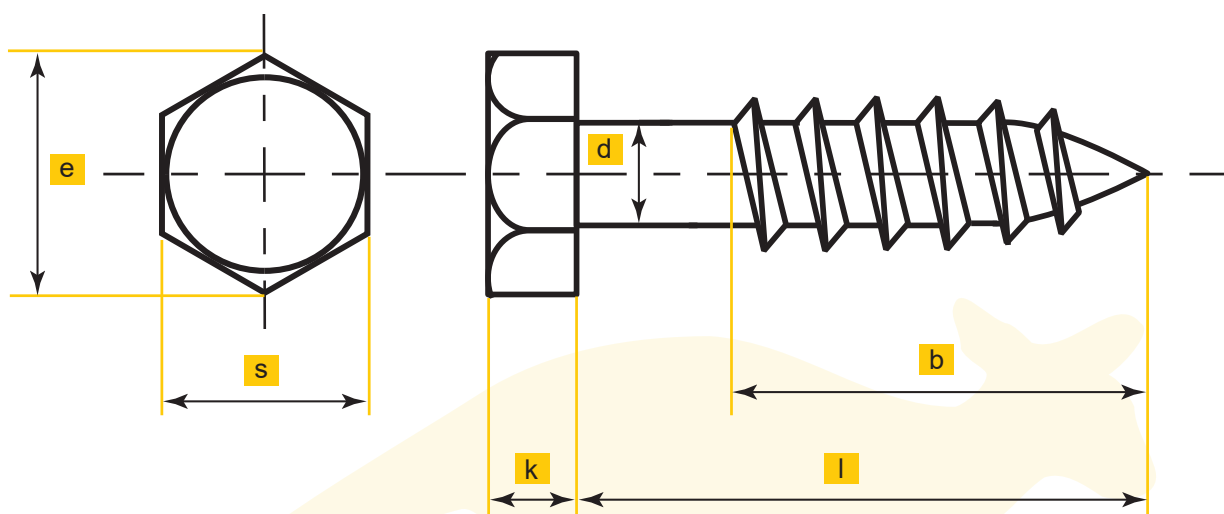

All sizes in mm

Nominal screw diameter	Shank Diameter (d)		Width Across Flats (s)		Width Across Corners (e)		Head Height (k)		Thread Length (b)	Gimlet Point Angle
	max	min	max	min	max	min	max	min	min	
6	6.48	5.52	10.00	9.64	11.50	10.89	4.38	3.62	0.6 x l	60 deg
8	8.58	7.42	13.00	12.57	15.00	14.20	5.68	4.92	0.6 x l	60 deg
10	10.58	9.42	16.00	15.57	18.40	17.59	6.85	5.95	0.6 x l	60 deg
12	12.70	11.30	18.00	17.57	20.70	19.85	7.95	7.05	0.6 x l	60 deg
16	16.70	15.30	24.00	23.16	27.70	26.17	10.75	9.25	0.6 x l	60 deg
20	20.84	19.16	30.00	29.16	34.60	32.95	13.40	11.60	0.6 x l	60 deg

The full version of the AS 1393:1997 standard is available to download from the main coach screw category page on our website

