


Abrasive fibre disc

FS 964 ACT

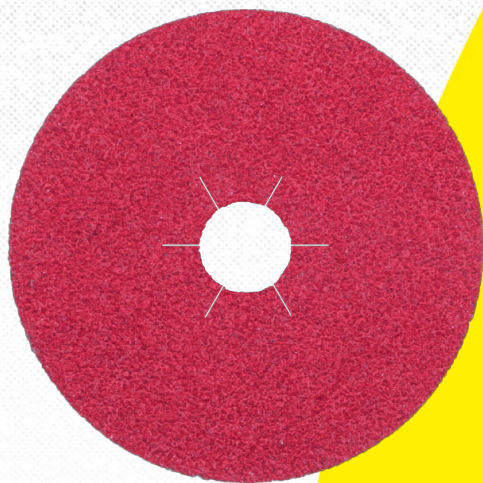

Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close

Product benefit

Premium product with excellent performance for working on steel -
Micro-crystalline self-sharpening effect - High aggressiveness thanks
to self-sharpening, aggressive ceramic grains throughout the service
life - Outstanding grit adhesion - Advanced coating technology (ACT)
for extraordinary grain adhesion and extended service life

Application

Steel	●
Stainless steel	●

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Hole in mm	Hole pattern	grain	Vmax m/s	Max. RPM	type of coat.abras.	bore shape	Packing unit/pcs.	Cat. number
125 x 22	⊗ 30	24	80 m/s	12200 rpm	FS 964	star shaped hole	25	330484
125 x 22	⊗ 30	36	80 m/s	12200 rpm	FS 964	star shaped hole	25	330485
125 x 22	⊗ 30	60	80 m/s	12200 rpm	FS 964	star shaped hole	25	330487
125 x 22	⊗ 30	80	80 m/s	12200 rpm	FS 964	star shaped hole	25	330490

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany

Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186

sales@klingspor.de - www.klingspor.de



Diameter x Hole in mm	Hole pattern	grain	Vmax m/s	Max. RPM	type of coat.abras.	bore shape	Packing unit/pcs.	Cat. number
125 x 22	⊗ 30	120	80 m/s	12200 rpm	FS 964	star shaped hole	25	330491
180 x 22	⊗ 30	24	80 m/s	8500 rpm	FS 964	star shaped hole	25	330489
180 x 22	⊗ 30	36	80 m/s	8500 rpm	FS 964	star shaped hole	25	330492
180 x 22	⊗ 30	60	80 m/s	8500 rpm	FS 964	star shaped hole	25	330495

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany

Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186

sales@klingspor.de - www.klingspor.de

